

INSERT FOR AMORPHOUS PLASTICS- IHL/IHLH


NOTES

IHL is designed for installation into notch sensitive amorphous thermoplastics by heat. It features rounded knurls, avoiding the stress raising sharp crests and roots which typify knurls used on most inserts.



IHL/IHLH

THREA D Metric UNC	D	H	B	A	L	Hole Size +0.10 -0.0	Min Wall Thickness
M2	3,5	4,8	0,51	3,1	3,9	3,2	1,4
M2.5	4,4	5,5	0,58	3,9	5,8	4,0	1,8
M3	4,4	5,5	0,58	3,9	5,8	4,0	1,8
M3.5	5,2	6,4	0,74	4,7	7,1	4,8	2,1
M4	6,1	7,1	0,89	5,5	8,1	5,6	2,4
M5	6,9	7,9	1,07	6,3	9,5	6,4	2,8
M6	8,5	9,5	1,32	7,9	12,7	8,0	3,6
M8	10,0	11,1	1,32	9,5	12,7	9,6	5,0

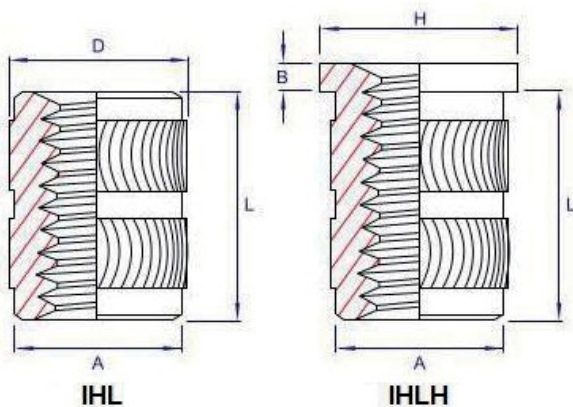

MATERIALS AND OTHER TYPES

- Brass, Stainless Steel to special order
- Aluminium to special order