

PRESS-IN INSERT - IFL/IFLH

NOTES


IFL/IFLH is a press-in insert which can be easily installed into most thermoplastic materials. It features a combination of sharp fins and straight knurls. Unlike the press-in locking range, this insert has a free running thread. Headed version is also available.



IFL/IFLH

THREAD Metric UNC	D	H	B	A	L	Nb of fins	Hole Size +0.10 -0.0	Min Wall Thickness
M2	3,7	4,8	0,45	3,1	4,0	2	3,2	1,6
M2.5	4,5	5,5	0,58	3,9	4,8	3	4,0	2,0
M3	4,5	5,5	0,58	3,9	4,8	3	4,0	2,0
M3.5	5,3	6,4	0,74	4,7	6,4	4	4,8	2,4
M4	6,1	7,1	0,89	5,5	7,9	5	5,6	2,8
M5	7,0	7,9	1,07	6,3	9,5	5	6,4	3,2
M6	8,6	9,5	1,32	7,9	12,7	7	8,0	4,0
M8	10,2	11,1	1,32	9,5	12,7	7	9,6	4,8

PRESS-IN INSERT - IFL/IFLH

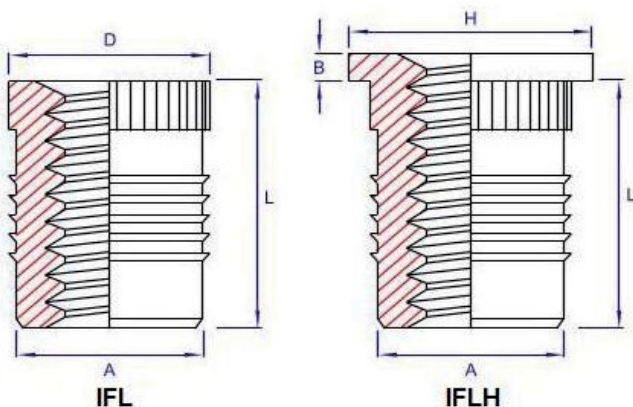

MATERIALS AND OTHER TYPES

- Brass, Stainless Steel to special order
- Aluminium to special order