

SELF TAPPING INSERT - ISCT/IHSCT

NOTES


ISCT is a self-tapping insert suitable for installation into a wide range of thermoplastic and thermosetting plastic materials. They are particularly suitable for applications involving high jack-out loading and materials with low core strengths. Headed version also available.



ISCT/IHSCT

THREAD Metric UNC	A	B	C	D Max	Rec Hole Size Thermoplastics	Rec Hole Size Thermosets	Min Wall Thickness
M2.5	6,0	0,58	6,0	4,5	4,0 - 4,1	4,1 - 4,3	Evaluated by pre-production tests
M3	6,0	0,58	6,5	5,0	4,5 - 4,6	4,6 - 4,8	
M3.5	8,0	0,73	7,5	6,0	5,3 - 5,4	5,5 - 5,7	
M4	8,0	0,89	8,0	6,5	5,8 - 5,9	6,0 - 6,2	
M5	10,0	1,06	9,5	8,0	7,1 - 7,2	7,3 - 7,6	
M6	14,0	1,32	12,0	10,0	8,6 - 8,8	9,0 - 9,4	
M8	15,0	1,32	14,0	12,0	10,6 - 10,8	11,0 - 11,4	
M10	18,0	1,57	16,0	14,0	12,6 - 12,8	13,0 - 13,4	
M12	22,0	1,57	18,0	16,0	14,6 - 14,8	15,0 - 15,4	

SELF TAPPING INSERT – ISCT/IHSCT

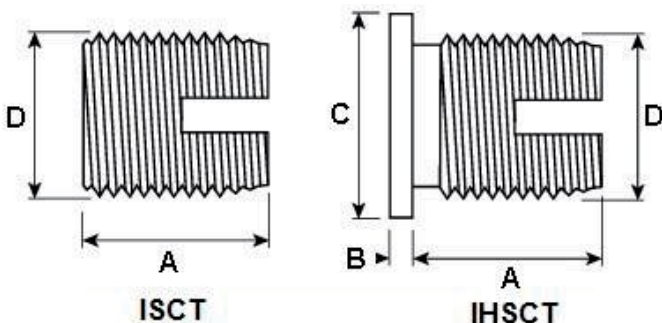

MATERIALS AND OTHER TYPES

- Brass
- Carbon Steel