

SYMMETRIC INSERT- ITEC

NOTES


The ITEC features a unique combination of opposed knurls and knurled vanes substantially increasing performance levels, even over the Ultrasonic insert. Installation is simplified by the symmetric nature of the insert, eliminating the need for orientation during automated or hand feeding.



ITEC

THREAD Metric UNC	D	A	L	Alternative Length	Hole Size + 0.10 - 0.0	Minimum Wall Thickness
M2	3,5	3,1	4,0	3	3,2	1
M2.5	4,4	3,9	5,7	4	4,0	1
M3	4,4	3,9	5,7	4,0 / 4,8	4,0	1
M3.5	5,2	4,7	7,1	5,0	4,8	1
M4	6,1	5,5	8,1	4,0 / 4,8 / 5,8	5,6	2
M5	6,8	6,3	9,5	5,8	6,4	2
M6	8,5	7,9	12,7	6,8 / 9,5	8,0	3
M8	10,0	9,5	12,7	–	9,6	4
M10	12,3	11,8	12,7	–	11,9	6
M12	16,3	15,8	15,9	–	16,0	8

SYMMETRIC INSERT – ITEC

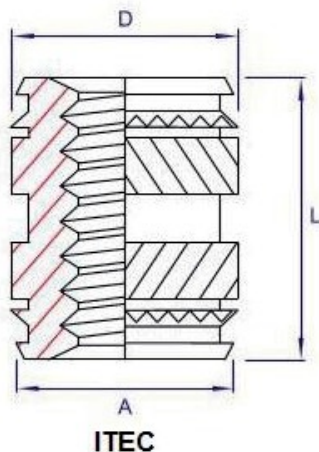

MATERIALS AND OTHER TYPES

- Brass
- Stainless Steel to special order
- Aluminum to special order